


Solution with 2 units

- Capacity range from 20 to 50 kW
- 2, 3 or 4 stages depending the units
- Continue modulation from 10 to 100% with a DIGITAL unit




- Suction line
- Liquid line
- Liquid equalization line
- Gas equalization line
- Oil equalization line

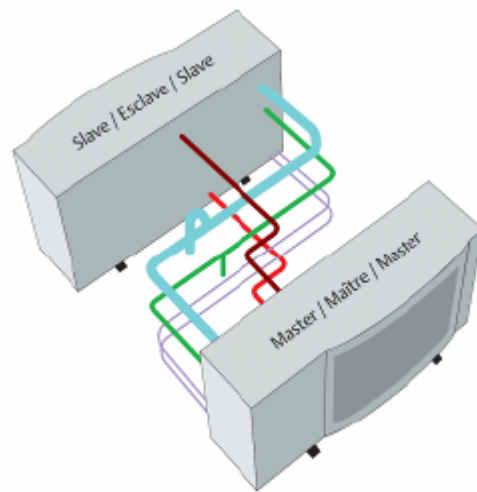


Solution with 2 units

- Master & Slave units connections

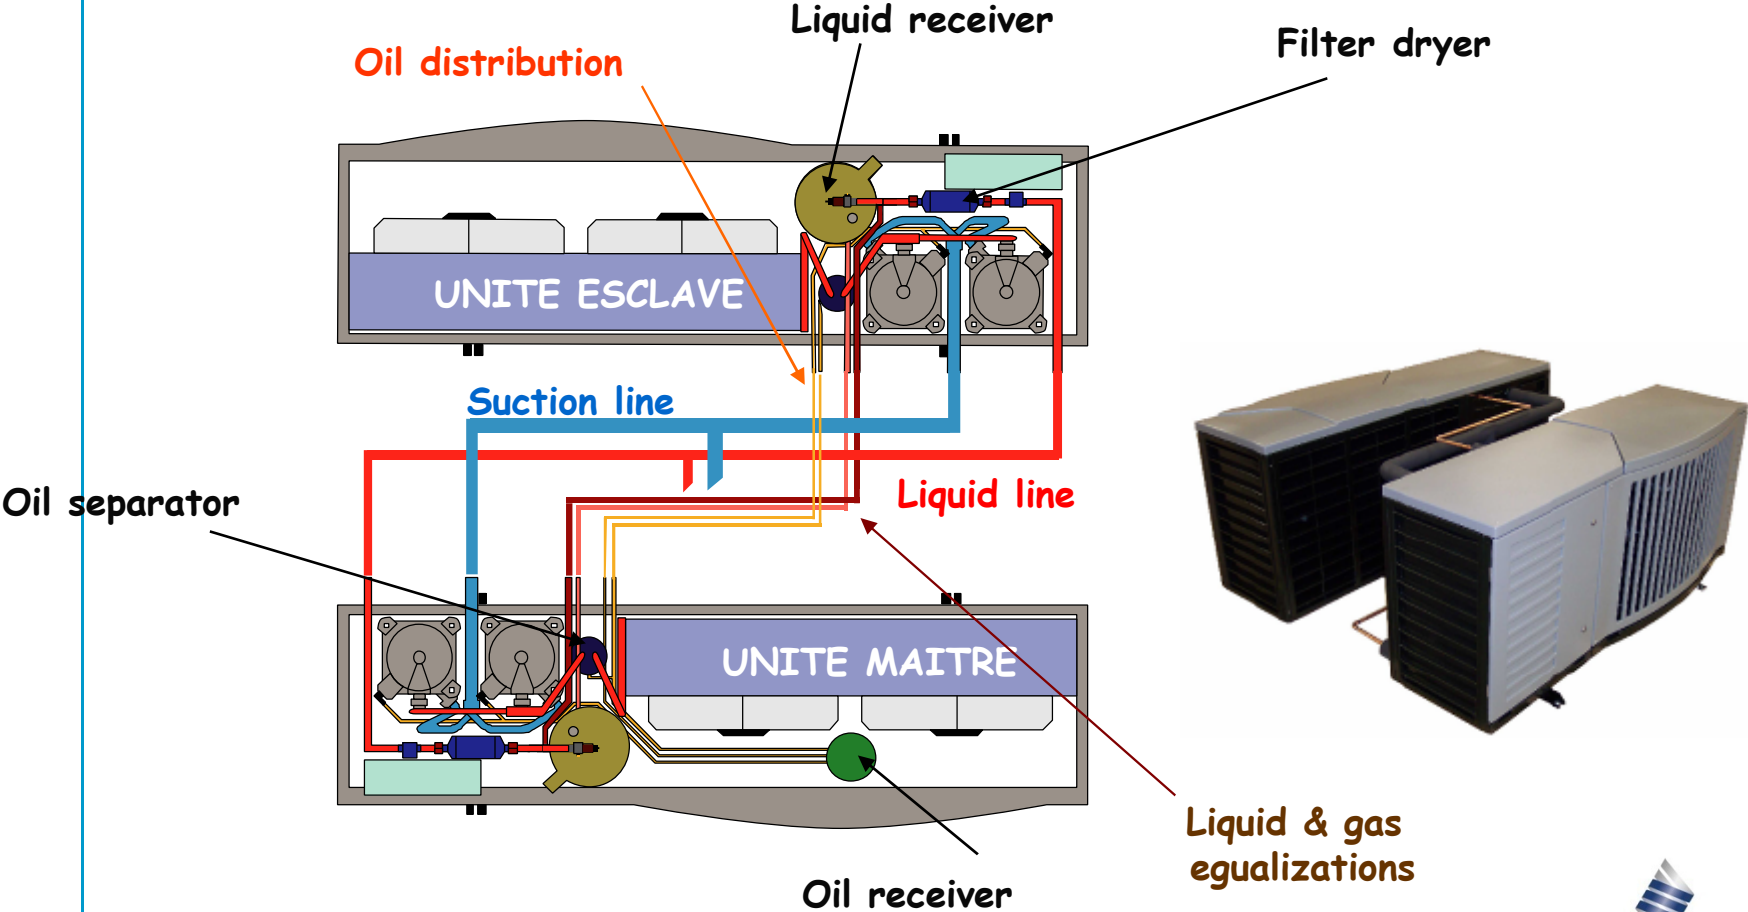


Solution with 3 or 4 units

- Capacity range from 30 to 100 kW
- Until 8 stages with tandem units
- Continue modulation from 10 to 100% with a DIGITAL unit

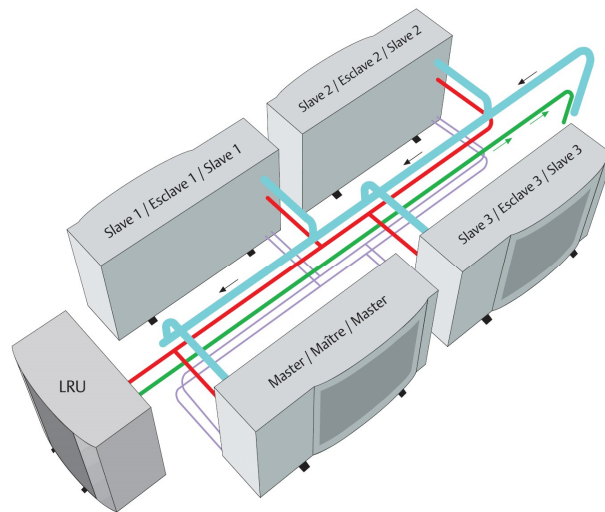


- Suction line
- Liquid line
- Liquid equalization
- Oil Distribution

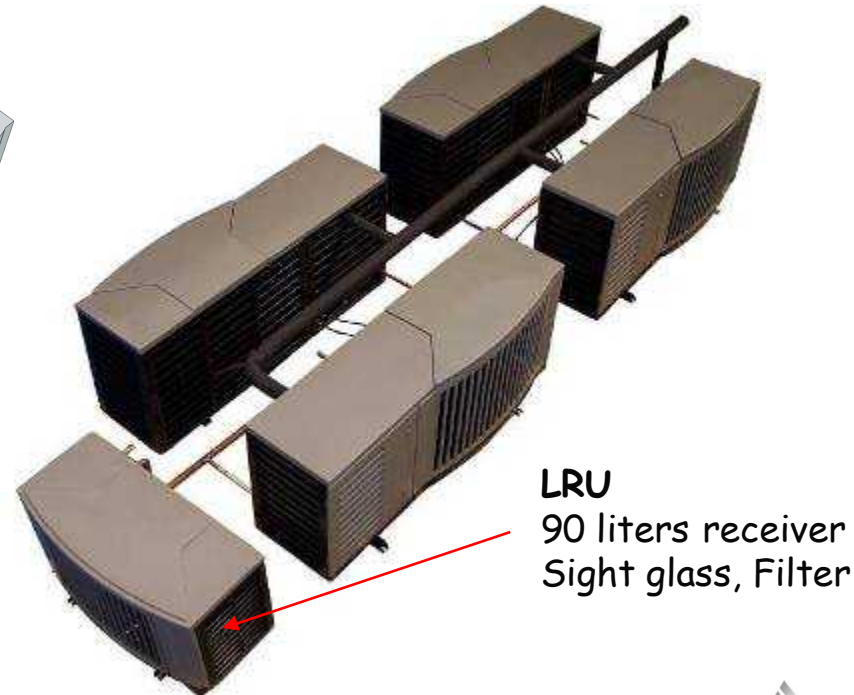

LRU
90 liters receiver
Sight glass, Filter

Solution with 3 or 4 units

- Units connections: 1 Master + 2 Slaves

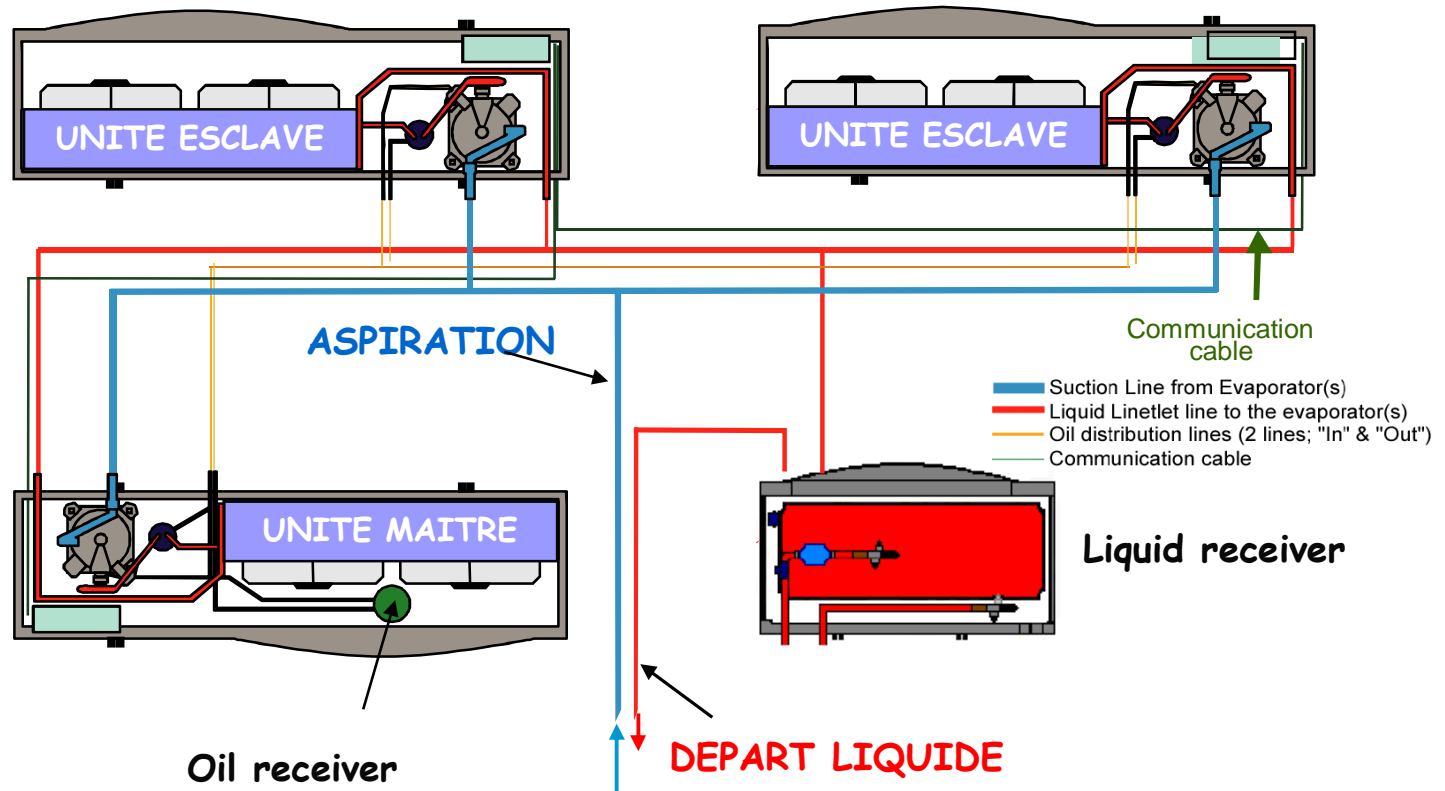

This document was created with Win2PDF available at <http://www.win2pdf.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.
This page will not be added after purchasing Win2PDF.